


TT5 SERIES



DIMENSIONS

TT5

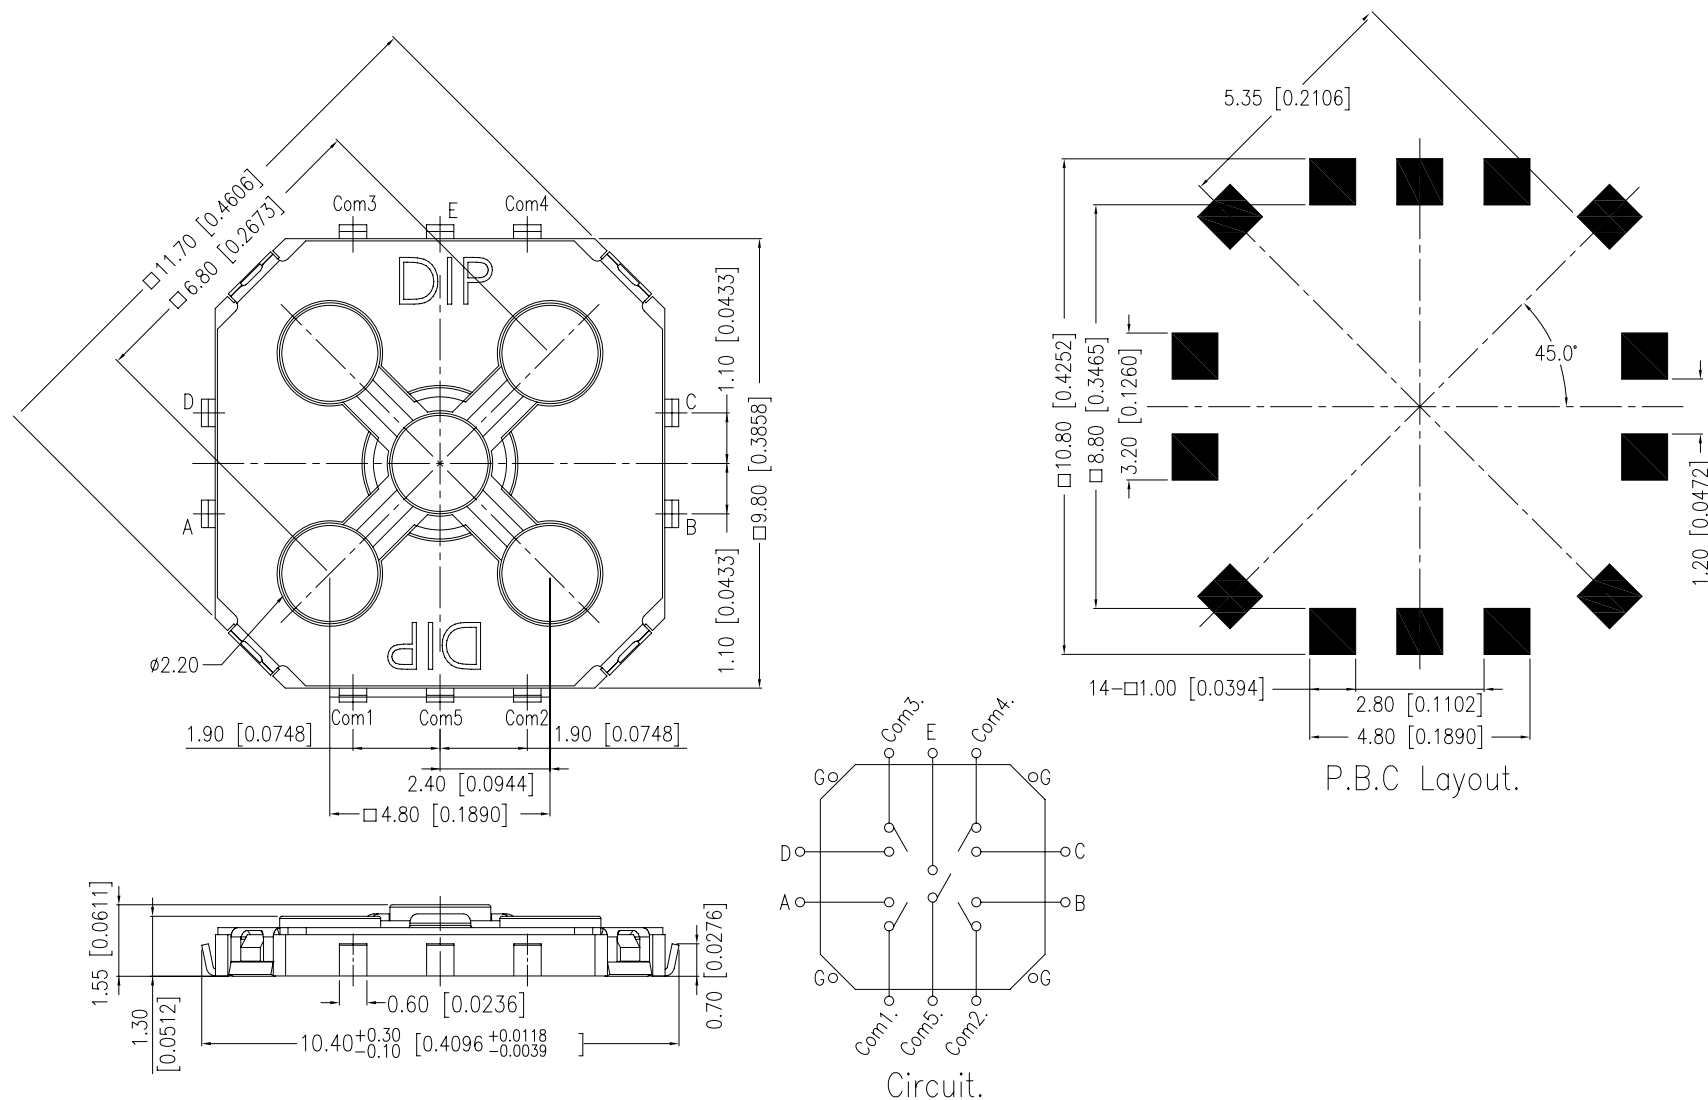

General Tolerance : $\pm 0.2\text{mm}$

HOW TO ORDER

TT5 - □ - □

Package :
 T/R = Tape & Reel
 B = Tube

Soldering :
 V = Lead Free Solderable

Thinner Multi Function Tact Switch

SPECIFICATION

△ MECHANICAL

Operation Force : Side : $180 \pm 60\text{gf}$
 Center : $320 \pm 80/-60\text{gf}$
 Stroke : $0.25 \pm 0.15\text{mm}$
 Operation Temperature Range : -20°C to $+70^\circ\text{C}$
 Storage Temperature Range : -40°C to $+85^\circ\text{C}$

△ ELECTRICAL


Electrical Life: 200,000 cycles
 Rating: 50mA, 12VDC
 Contact Resistance: 100m Ω max.
 Insulation Resistance: 100M Ω min. at 500 V DC
 Dielectric Strength: 250 VAC / 1 minute
 Contact Arrangement: 1 pole 1 throw

MATERIAL

△ BASE : High-Temp Thermoplastic Nylon UL 94V-0
 △ COVER : Nickel silver
 △ STEM : High-Temp Thermoplastic Nylon UL 94V-0
 COLOR : BLACK
 △ CONTACT Disc : Stainless with silver cladding
 △ TERMINAL: Brass with silver plated
 △ TAPE: Teflon

SOLDERING PROCESSES


- △HAND SOLDERING : Use a soldering iron of 30 watts, controlled at 350℃ approximately max 5 seconds.
- △REFLOW SOLDERING: When applying reflow soldering, the peak temperature or the reflow Oven should be set at 260℃ max.

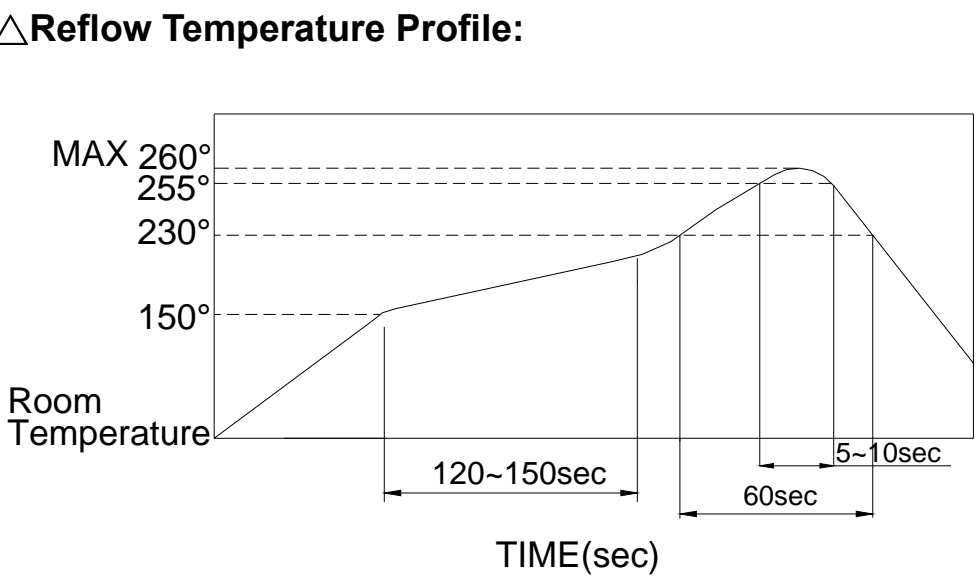

PACKING

Part Number	Number Per Tube	Part Number	Number Per Tube
TT5-V	47	2500	-

TT5 REEL

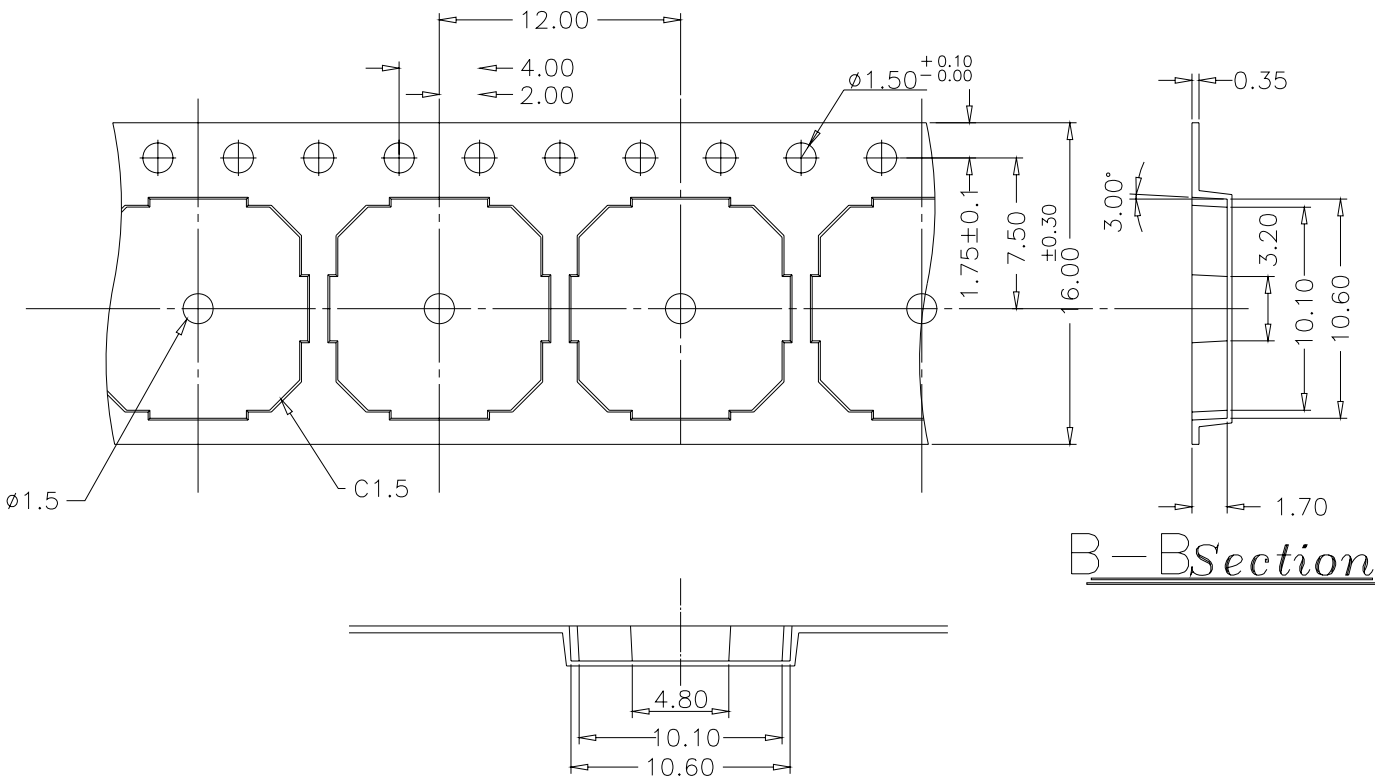


B-BSection

A-ASection

General Tolerance : $\pm 0.1\text{mm}$

TT5 TUBE

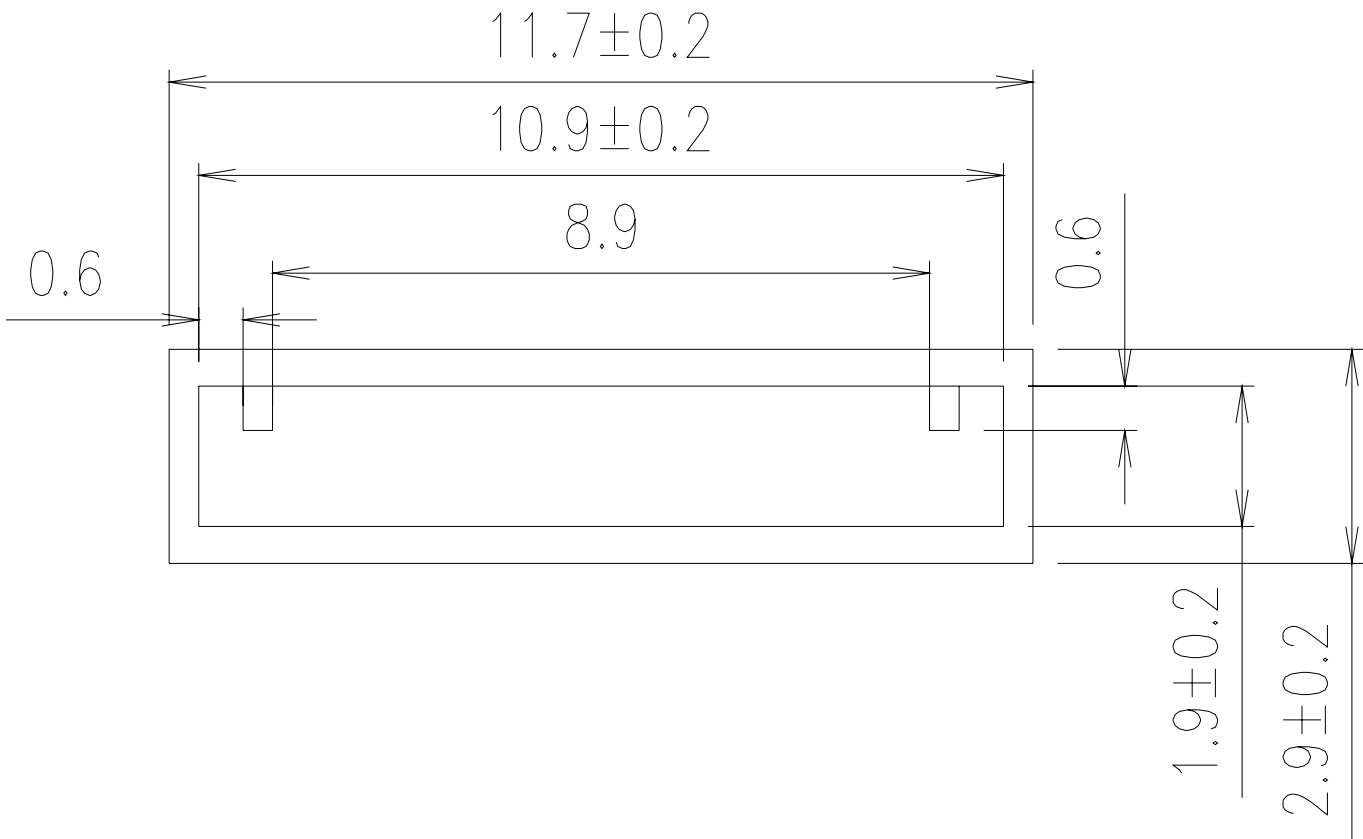

General Tolerance : $\pm 0.2\text{mm}$